SUNEX®
TOOLS

POWERFUL, HIGH-SPEED PERFORMANCE FOR PRECISION

GRINDING, PORTING, DEBURRING, POLISHING, & WELD GRINDING



- **Strong 0.5HP Motor -** Delivers high-speed performance for demanding tasks like porting, weld grinding, deburring, and polishing
- **Adjustable Power Regulator -** Enables precise speed control for working on different materials with maximum efficiency and safety
- **Lightweight Composite Body -** Weighs just 1.3 lbs. and is built for durability while reducing operator fatigue during long grinding sessions

SX5207

SUNEX® TOOLS

SUNEXPRESS WARRANTY

1 YEAR WARRANTY

0.5 HP STRAIGHT DIE GRINDER

Ergonomic overmold grip provides a comfortable non-slip hold and reduces vibration for improved handling and control

Adjustable Speed Control



Safety lock trigger helps prevent accidental start-up, adding an extra layer safety in busy or mobile work environments

Rear exhaust system directs air and debris away from the work surface and operator, maintaining visibility and a cleaner workspace

SPECIFICATIONS FOR SX5207

Collet Size	1/4"
Free Speed	22,000 RPM
Length	7"
Width	3"
Average Air Consumption	3.5 CFM
Maximum Air Pressure	90 PSI
Air Inlet	1/4" NPT
Minimum Hose Size	3/8" I.D.
Sound Level	82 dBA
Weight	1.3 lbs.

SUNEX® TOOLS

ENGINEERED FOR PERFORMANCE, PRECISION, AND ACCESSIBILITY IN TIGHT WORKSPACES



- **Strong 0.5HP Motor -** Delivers high-speed performance for demanding tasks like porting, weld breaking, deburring, and polishing
- **90° Angle Head Design -** Offers improved access in tight or confined spaces, making it ideal for under-dash, engine bay, and frame work
- **Adjustable Power Regulator -** Enables precise speed control for working on different materials with maximum efficiency and safety
- **Lightweight Composite Body -** Weighs just 1.54 lbs. and is built for durability while reducing operator fatigue during long grinding sessions

SX5208

SUNEX® TOOLS

SUNEXPRESS WARRANTY

1 YEAR WARRANTY

0.5 HP RIGHT ANGLE DIE GRINDER

90° angle head design improves access in tight or confined spaces, ideal for under-dash, engine bay, and frame work

Ergonomic overmold grip provides a comfortable non-slip hold and reduces vibration for improved handling and control

Adjustable Speed Control



Safety lock trigger helps prevent accidental start-up, adding an extra layer of safety in busy or mobile work environments

Rear exhaust system directs air and debris away from the work surface and operator, maintaining visibility and a cleaner workspace

SPECIFICATIONS FOR SX5208

Collet Size	1/4"
Free Speed	18,000 RPM
Length	7"
Width	3"
Average Air Consumption	3.5 CFM
Maximum Air Pressure	90 PSI
Air Inlet	1/4" NPT
Minimum Hose Size	3/8" I.D.
Sound Level	82 dBA
Weight	1.54 lbs.

SUNEX® TOOLS

115º ANGLE HEAD DESIGN PROVIDES OPTIMAL ACCESS TO TIGHT, AWKWARD AREAS



- **Strong 0.5HP Motor -** Delivers high-speed performance for demanding applications, weld grinding, polishing, and gasket removal
- **115° Angle Head Design Ideal Reach in Tight, Awkward Angles -** perfect for auto bodywork, brake cleaning, and prep
- **Adjustable Power Regulator -** Enables precise speed control for working on different materials with maximum efficiency and safety
- **Lightweight Composite Body -** Weighs just 1.6 lbs. and is built for durability while reducing operator fatigue during long grinding sessions

SX5204

SUNEX® TOOLS

SUNEXPRESS WARRANTY

1 YEAR WARRANTY

0.5 HP 115° ANGLE DIE GRINDER

115° angle head design offers the ideal reach and positioning for tight or awkward angle

Ergonomic overmold grip provides a comfortable non-slip hold and reduces vibration for improved handling and control

Adjustable Speed Control



Safety lock trigger helps prevent accidental start-up, adding an extra layer of safety in busy or mobile work environments

Rear exhaust system directs air and debris away from the work surface and operator, maintaining visibility and a cleaner workspace

SPECIFICATIONS FOR SX5204

Collet Size	1/4"
Free Speed	18,000 RPM
Length	8"
Width	3"
Average Air Consumption	6 CFM
Maximum Air Pressure	90 PSI
Air Inlet	1/4" NPT
Minimum Hose Size	3/8" I.D.
Sound Level	81 dBA
Weight	1.6 lbs.


SUNEX®
TOOLS

ENGINEERED FOR MAXIMUM POWER, CONTROL & REACH

IN HARD-TO-ACCESS AREAS





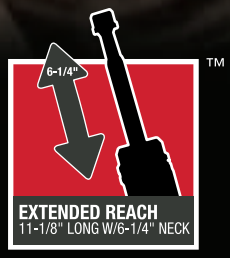





- **Strong 0.5HP Motor -** Delivers high-performance grinding and shaping with consistent speed and torque for demanding applications
- **Extended Reach Shaft -** Provides access to tight or recessed areas that standard die grinders can't reach with a 1/4" collet, improving versatility in shop and field use
- **Adjustable Power Regulator -** Enables precise speed control for working on different materials with maximum efficiency and safety
- **Lightweight Composite Body -** Weighs just 2.5 lbs. and is built for durability while reducing operator fatigue during long grinding sessions

SX5200

SUNEX® TOOLS

SUNEXPRESS WARRANTY

1 YEAR WARRANTY

0.5 HP 5" EXTENDED REACH DIE GRINDER



SPECIFICATIONS FOR SX5200

Collet Size	1/4"
Free Speed	20,000 RPM
Length	11-1/8"
Width	3"
Average Air Consumption	4.2 CFM
Maximum Air Pressure	90 PSI
Air Inlet	1/4" NPT
Minimum Hose Size	3/8" I.D.
Sound Level	82 dBA
Weight	2.5 lbs.

SUNEX® TOOLS

PRECISION, CONTROL, AND POWER

FOR PROFESSIONAL TIRE REPAIR AND PREPARATION



- **Strong 0.5HP Motor -** Provides consistent torque and performance for fast, effective tire buffing and rubber removal
- **Quick-Change 5/16" Hex Chuck -** Allows rapid accessory swaps to keep your workflow moving without interruption
- **Adjustable Power Regulator -** Offers precise control for various buffing tasks, preventing overworking or damage to tires
- **Lightweight Composite Body -** Weighs 1.75 lbs. to minimize user fatigue while maintaining durability in tough shop conditions

SX8202

SUNEX® TOOLS

SUNEXPRESS WARRANTY

1 YEAR WARRANTY

0.5 HP TIRE BUFFER



SPECIFICATIONS FOR SX8202

Chuck Size	5/16"
Free Speed	3,600 RPM
Length	9"
Width	3"
Average Air Consumption	3.5 CFM
Maximum Air Pressure	90 PSI
Air Inlet	1/4" NPT
Minimum Hose Size	3/8" I.D.
Sound Level	83 dBA
Weight	1.75 lbs.

SUNEX®
TOOLS

BUILT FOR PRECISION, POWER, AND STAFETY

IN DEMANDING AUTOMOTIVE & FABRICATION ENVIRONMENTS



- **Strong 0.5HP Motor -** Delivers fast, precise cutting performance for mufflers, tailpipes, nuts, bolts, and more — perfect for vehicle repair and fabrication work
- **Oversized Cutting Guard -** Lets you control the direction of sparks for safer operation in tight or awkward spaces, enhancing versatility and user safety
- **Adjustable Power Regulator -** Enables precise speed control for working on different materials with maximum efficiency and safety
- **Lightweight Composite Body -** Lightweight 1.8 lbs. design reduces fatigue and stands up to tough, all-day cutting tasks

SX6213

SUNEX® TOOLS

SUNEXPRESS WARRANTY

1 YEAR WARRANTY

0.5 HP 3" CUT-OFF TOOL

Oversized cutting guard controls spark direction for safer operation in tight spaces, improving versatility and user protection

Ergonomic overmold grip provides a comfortable non-slip hold and reduces vibration for improved handling and control

Adjustable Speed Control



Includes (1) 3" Cutting Wheel for precise cutting of mufflers, tailpipes, nuts, bolts and more

Safety lock trigger helps prevent accidental start-up, adding an extra layer safety in busy or mobile work environments

Rear exhaust system directs air and debris away from the work surface and operator, maintaining visibility and a cleaner workspace

SPECIFICATIONS FOR SX6213

Free Speed	22,000 RPM
Cutting Capacity	18 Gauge Sheet Metal
Length	7.6"
Width	3"
Average Air Consumption	3.5 CFM
Maximum Air Pressure	90 PSI
Air Inlet	1/4" NPT
Minimum Hose Size	3/8" I.D.
Sound Level	77 dBA
Weight	1.8 lbs.

SUNEX® TOOLS

AGGRESSIVE CUTTING POWER & PRECISION PERFORMANCE

FOR DEMANDING APPLICATIONS IN AUTOMOTIVE, FABRICATION, AND METALWORKING ENVIRONMENTS



- **Strong 0.5HP Motor -** Delivers aggressive cutting power and performance for automotive, fabrication, and metalworking applications
- **Quick-Change Connector -** Accepts standard and saber-style reciprocating saw blades with tool-free installation, speeding up blade swaps and minimizing downtime
- **Adjustable Power Regulator -** Enables precise speed control for working on different materials with maximum efficiency and safety
- **Lightweight Composite Body -** Lightweight 2.43 lbs. design reduces fatigue and stands up to tough, all-day cutting tasks


SX7200

SUNEX® TOOLS

SUNEXPRESS WARRANTY

1 YEAR WARRANTY

0.5 HP GEARED RECIPROCATING SAW

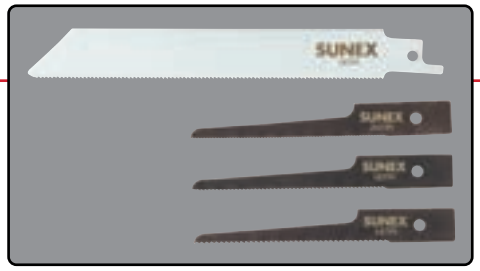

Includes (1) 6" Reciprocating Saw Blade (18T) and (3) 3"Saw Blades (14T, 18T & 24T)



Ergonomic overmold grip provides a comfortable non-slip hold and reduces vibration for improved handling and control

Adjustable Speed Control

Quick-change connector fits standard & saber blades - tool-free install speeds swaps and cuts downtime

Safety lock trigger helps prevent accidental start-up, adding an extra layer safety in busy or mobile work environments

Rear exhaust system directs air and debris away from the work surface and operator, maintaining visibility and a cleaner workspace

SPECIFICATIONS FOR SX7200

Free Speed	5,000 SPM
Length	7"
Width	3"
Average Air Consumption	3.5 CFM
Maximum Air Pressure	90 PSI
Air Inlet	1/4" NPT
Minimum Hose Size	3/8" I.D.
Sound Level	87 dBA
Weight	2.43 lbs.

SUNEX®
TOOLS

PRECISION METAL CUTTING

WITH CLEAN RESULTS AND MINIMAL DISTORTION



- **Strong 0.5HP Motor -** Delivers clean, accurate cuts through 18-gauge sheet metal with minimal distortion—ideal for auto body and fabrication work
- **3/16" Cut Radius with Oversized Punch -** Enables tight, controlled curves and intricate cuts while reducing punch wear for longer tool life
- **Adjustable Power Regulator -** Enables precise speed control for working on different materials with maximum efficiency and safety
- **Lightweight Composite Body -** Weighs just 2.25 lbs. to reduce operator fatigue while standing up to the demands of daily shop use

SX6212

SUNEX®
TOOLS

SUNEXPRESS WARRANTY

1 YEAR WARRANTY

0.5 HP AIR NIBBLER

3/16" cut radius oversized punch for tight curves, intricate cuts, and reduced punch wear for longer tool life



Ergonomic overmold grip provides a comfortable non-slip hold and reduces vibration for improved handling and control

Adjustable Power Regulator

Safety lock trigger helps prevent accidental start-up, adding an extra layer safety in busy or mobile work environments

Rear exhaust system directs air and debris away from the work surface and operator, maintaining visibility and a cleaner workspace

SPECIFICATIONS FOR SX6212

Free Speed	2,500 SPM
Max Material Thickness (Sheet Metal)	18 gauge
Length	7"
Width	4.1"
Average Air Consumption	3.5 CFM
Maximum Air Pressure	90 PSI
Air Inlet	1/4" NPT
Minimum Hose Size	3/8" I.D.
Sound Level	84 dBA
Weight	2.25 lbs.

SUNEX®
TOOLS

EFFORTLESS CUTTING PERFORMANCE

SHEET METAL, PLASTIC AND ALUMINUM



- **Strong 0.5HP Motor -** Cuts sheet metal, plastic, and aluminum up to 18 gauge and is ideal for auto body and fab work
- **Durable Aluminum Shear Head -** Engineered for long-lasting durability and precision cutting, whether you're working straight, curved, or angled lines
- **Adjustable Power Regulator -** Enables precise speed control for working on different materials with maximum efficiency and safety
- **Lightweight Composite Body -** Lightweight 2.2 lbs. design reduces fatigue and stands up to tough, all-day cutting tasks

SX6211

SUNEX® TOOLS

SUNEXPRESS WARRANTY

1 YEAR WARRANTY

0.5 HP AIR METAL SHEAR



Durable aluminum shear head Built for durability and precision cuts—straight, curved, or angled with ease

Ergonomic overmold grip provides a comfortable non-slip hold and reduces vibration for improved handling and control

Adjustable Speed Control

Safety lock trigger helps prevent accidental start-up, adding an extra layer safety in busy or mobile work environments

Rear exhaust system directs air and debris away from the work surface and operator, maintaining visibility and a cleaner workspace

SPECIFICATIONS FOR SX6211

Free Speed	2,600 SPM
Max Material Thickness (Sheet Metal)	18 gauge
Length	10"
Width	3"
Average Air Consumption	3.1 CFM
Maximum Air Pressure	90 PSI
Air Inlet	1/4" NPT
Minimum Hose Size	3/8" I.D.
Sound Level	80 dBA
Weight	2.2 lbs.

SUNEX®
TOOLS

YOUR GO-TO SOLUTION
FOR FAST, POWERFUL SURFACE REMOVAL AND PREP



- **Strong 0.5HP Motor -** Planetary Gear System delivers increased torque and extended tool life, making it ideal for heavy-duty surface preparation and removal tasks
- **180° Rotating Handle -** Allows for superior access and control in tight, awkward, or multi-angle configurations—ideal for hard-to-reach surfaces
- **Adjustable Power Regulator -** Enables precise speed control for working on different materials with maximum efficiency and safety
- **Includes 5 Wheels -** (1) rubber eraser wheel, (3) wire wheels (2 coarse & 1 fine), and (1) stripping wheel to tackle any job
- **Lightweight Composite Body -** Weighs in at only 2.7 lbs. and is built for durability while reducing operator fatigue during long sessions

SX8203

SUNEX® TOOLS

SUNEXPRESS WARRANTY

1 YEAR WARRANTY

0.5 HP SURFACE BLASTER KIT

Protective guard offers safety and compatibility with a wide range of surface prep wheels

180° rotating handle improves accessibility in tight or awkward areas, making it ideal for detailed bodywork or restoration jobs

Ergonomic overmold grip provides a comfortable non-slip hold and reduces vibration for improved handling and control

Adjustable Speed Control



Safety lock trigger helps prevent accidental start-up, adding an extra layer safety in busy or mobile work environments

Rear exhaust system directs air and debris away from the work surface and operator, maintaining visibility and a cleaner workspace

Kit Includes:
(1) 4" Rubber Eraser Wheel
(3) 4" Wire Wheels (2 coarse & 1 fine)
(1) 4" stripping wheel
(1) Wheel Hub
(1) Hex Allen Key



SPECIFICATIONS FOR SX8203

Spindle Thread Size	9mm
Free Speed	4,000 RPM
Length	10"
Width	5.4"
Average Air Consumption	3.5 CFM
Maximum Air Pressure	90 PSI
Air Inlet	1/4" NPT
Minimum Hose Size	3/8" I.D.
Sound Level	86 dBA
Weight	2.7 lbs. (Tool) / 6.9 lbs. (Kit)

SUNEX®
TOOLS

BUILT FOR FAST, CLEAN REMOVAL

OF WHEEL WEIGHTS, ADHESIVE RESIDUE, AND VINYL GRAPHICS



- **Strong 0.5HP Motor -** Provides smooth, consistent performance for removing wheel weights, adhesive residue, and pinstripes without damaging vehicle surfaces
- **Standard 5/16" x 24 Spindle Thread -** Offers universal compatibility with most removal wheels and eraser discs for quick attachment and operation
- **Adjustable Power Regulator -** Delivers precise speed control for different materials and tasks, helping prevent paint or panel damage during removal
- **Lightweight Composite Body -** Weighs just 2.15 lbs. to reduce operator fatigue while standing up to the demands of daily shop use


SX8201

SUNEX® TOOLS

SUNEXPRESS WARRANTY

1 YEAR WARRANTY

0.5 HP WHEEL WEIGHT ADHESIVE & PINSTRIPE REMOVAL TOOL

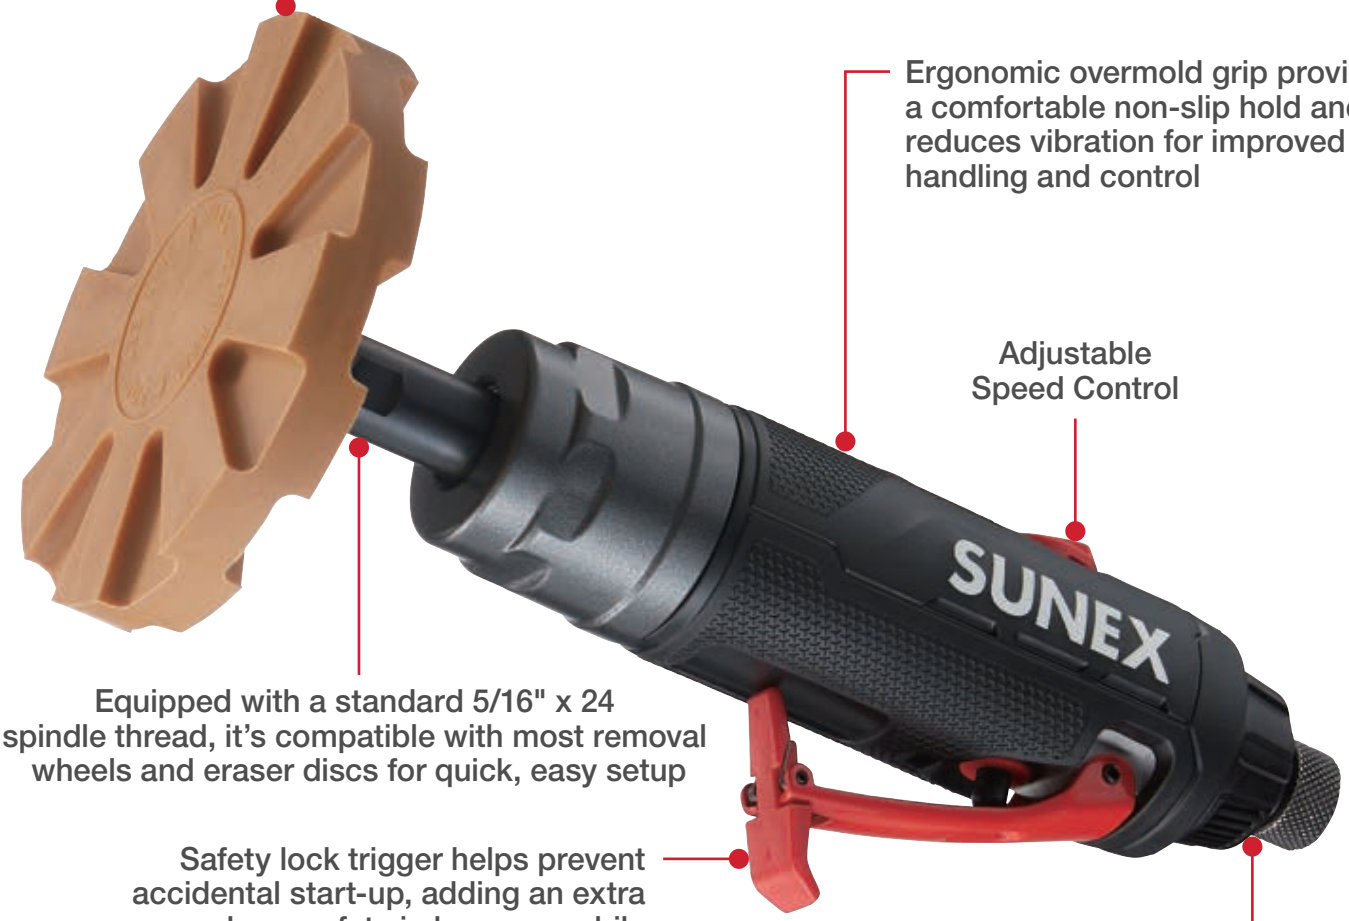

Includes (3) 4" Rubber Eraser Wheels

Ergonomic overmold grip provides a comfortable non-slip hold and reduces vibration for improved handling and control

Adjustable Speed Control

Equipped with a standard 5/16" x 24 spindle thread, it's compatible with most removal wheels and eraser discs for quick, easy setup

Safety lock trigger helps prevent accidental start-up, adding an extra layer safety in busy or mobile work environments

Rear exhaust system directs air and debris away from the work surface and operator, maintaining visibility and a cleaner workspace

SPECIFICATIONS FOR SX8201

Thread Size	5/16" x 24
Free Speed	2,600 RPM
Length	8.6"
Width	3"
Average Air Consumption	4 CFM
Maximum Air Pressure	90 PSI
Air Inlet	1/4" NPT
Minimum Hose Size	3/8" I.D.
Sound Level	80 dBA
Weight	2.15 lbs.