


SUNEX[®]

T O O L S

PRECISE TORQUE IS ONLY A CLICK AWAY

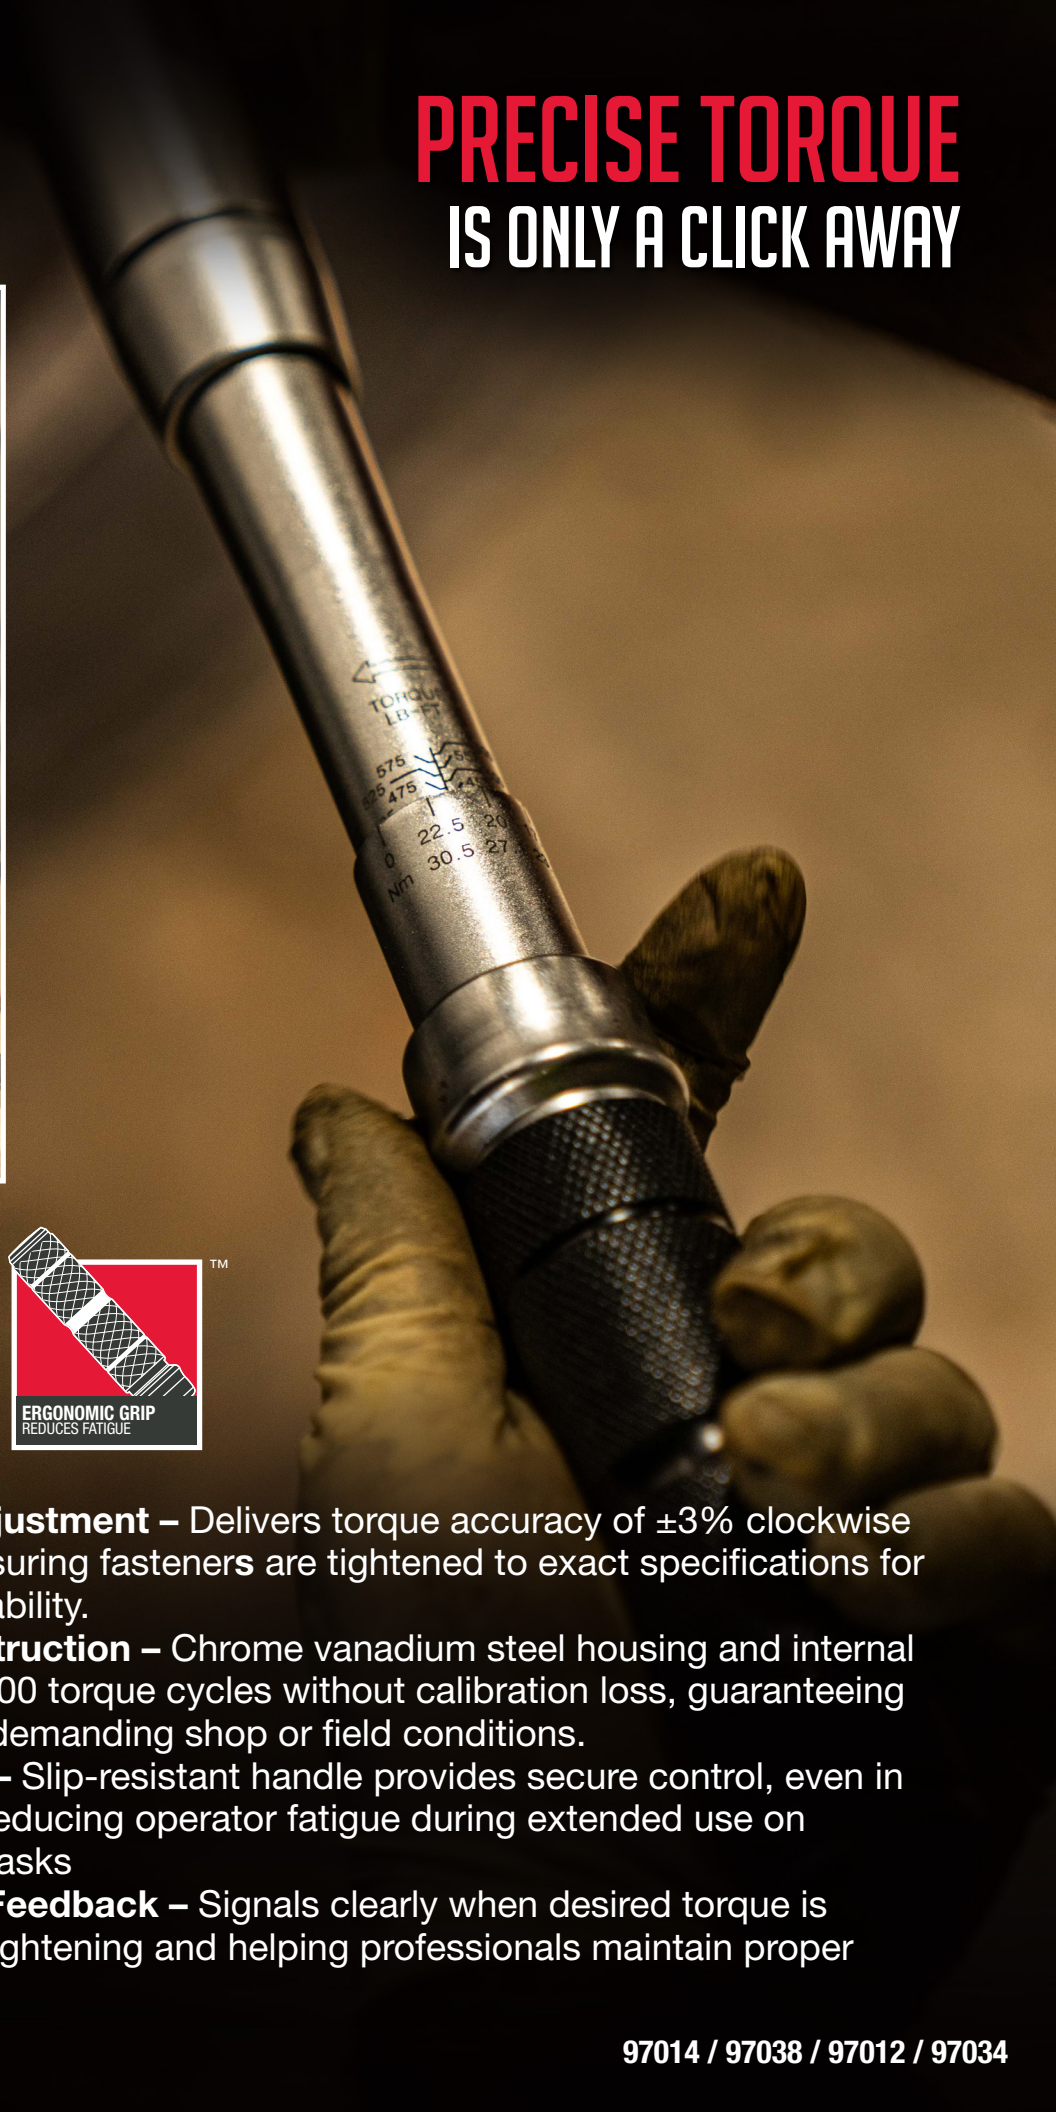

- **Precision Micrometer Adjustment** – Delivers torque accuracy of $\pm 3\%$ clockwise (20–100% of capacity), ensuring fasteners are tightened to exact specifications for safety and mechanical reliability.
- **Durable Alloy Steel Construction** – Chrome vanadium steel housing and internal components withstand 5,000 torque cycles without calibration loss, guaranteeing long-term performance in demanding shop or field conditions.
- **Ergonomic Knurled Grip** – Slip-resistant handle provides secure control, even in oily or wet environments, reducing operator fatigue during extended use on automotive and industrial tasks
- **Audible Click & Impulse Feedback** – Signals clearly when desired torque is reached, preventing over-tightening and helping professionals maintain proper torque control every time.

97014 / 97038 / 97012 / 97034

1/4", 3/8", 1/2" & 3/4" DR. DUAL-DIRECTION TORQUE WRENCHES



Pre-calibrated to accuracy:
CW $\pm 3\%$, CCW $\pm 6\%$

High-contrast clear laser etched in-lb./ft-lb. and Nm scales for quick, precise adjustments

Easy one-hand switch for forward/reverse torque

Ergonomic knurled grip slip-resistant handle provides secure control, even in oily or wet environments, reducing operator fatigue during extended use

Each torque wrench includes a Heavy-Duty Storage Case protecting the torque wrench during transport and storage

45-Tooth Ratcheting Mechanism with 8° Swing Arc for precise torque application in tight spaces

97014 - 1/4" DR.
40-200 IN-LBS.
(4-22 Nm)



97038 - 3/8" DR.
20-100 FT-LBS.
(25-135 Nm)



97012 - 1/2" DR.
20-250 FT-LBS.
(70-340 Nm)



97034 - 3/4" DR.
100-600 FT-LBS.
(150-800 Nm)



97014	1/4" DR. 40-200 IN-LBS. (4-22 Nm)
97038	3/8" DR. 20-100 FT-LBS. (25-135 Nm)
97012	1/2" DR. 20-250 FT-LBS. (70-340 Nm)
97034	3/4" DR. 100-600 FT-LBS. (150-800 Nm)