SUNEX®
TOOLS

THE EPITOME OF POWER & EFFICIENCY
IN A LIGHTWEIGHT DESIGN

3/8" DRIVE

200% GREATER POWER TO WEIGHT RATIO VERSUS COMPARABLE PRODUCTS

261 FT-LB / LB
POWER TO WEIGHT RATIO



- **High Performance -** Provides up to 600 ft-lbs. of breakaway torque and 400 ft-lbs. of working torque with 10,000 RPM, and a Power To Weight Ratio of 458 ft-lb/lb,, delivering exceptional power for demanding applications
- **Magnesium Alloy Housing -** At just 2.3 lbs., this tool minimizes fatigue for longer use and provides durability, improved heat dissipation, and resistance to corrosion and impact, ensuring reliable, long-lasting performance
- **7 Spring Loaded Rotor Blades -** Provide smoother operation and increased efficiency, leading to continuous high performance and a longer tool lifespan
- **Durable Handle -** High-impact resistant handle, crafted from 40% glass-filled nylon, offers a reliable grip with superior impact and wear resistance

SX3802

SUNEX® TOOLS

SUNEXPRESS WARRANTY

1 YEAR WARRANTY

3/8" DRIVE MAGNESIUM COMPOSITE IMPACT WRENCH

Magnesium Alloy front and rear housing at just 2.3 lbs., minimizes fatigue for longer use and provides durability, improved heat dissipation, and resistance to corrosion and impact, ensuring reliable, long-lasting performance





The convenient one-hand switch regulator offers variable power settings, enabling multiple adjustments for different tasks while keeping your second hand free

Variable speed throttle provides accurate control

The ergonomic handle design minimizes hand fatigue and improves user comfort ensuring a better user experience during prolonged use

The rotating air inlet enhances maneuverability, reduces hose twisting, and allows easier access to tight spaces, optimizing user comfort and efficiency

3/8" DRIVE

200% GREATER POWER TO WEIGHT RATIO VERSUS COMPARABLE PRODUCTS

261 FT-LB / LB POWER TO WEIGHT RATIO

SPECIFICATIONS FOR SX3802

Square Drive	3/8"
Breakaway Torque	600 ft.-lbs.
Working Torque	400 ft.-lbs.
Free Speed	10,000 RPM
Average Air Consumption	4.5 CFM
Air Inlet	1/4" NPT
Minimum Hose Size	3/8" I.D.
Length	5.5"
Sound Level	100.8 dBA
Weight	2.3 lbs.

SUNEX®
TOOLS

THE EPITOME OF POWER & EFFICIENCY
IN A LIGHTWEIGHT DESIGN

1/2" DRIVE

150% GREATER POWER TO WEIGHT RATIO VERSUS COMPARABLE PRODUCTS

458 FT-LB / LB
POWER TO WEIGHT RATIO

SX1202BT



NEW!
SUNEX 1/2" Impact Wrench Protective Boot for SX1202

- **High Performance -** Provides up to 1,650 ft-lbs. of breakaway torque and 750 ft-lbs. of working torque with 10,000 RPM, and a Power To Weight Ratio of 458 ft-lb/lb.,delivering exceptional power for demanding applications
- **Magnesium Alloy Housing -** At just 3.6 lbs., this tool minimizes fatigue for longer use and provides durability, improved heat dissipation, and resistance to corrosion and impact, ensuring reliable, long-lasting performance
- **7 Spring Loaded Blades -** Provide smoother operation and increased efficiency, leading to continuous high performance and a longer tool lifespan
- **Durable Handle -** High-impact resistant handle, crafted from 40% glass-filled nylon, offers a reliable grip with superior impact and wear resistance

SX1202

SUNEX® TOOLS


SUNEXPRESS WARRANTY

1 YEAR WARRANTY

1/2" DRIVE MAGNESIUM COMPOSITE IMPACT WRENCH

Magnesium Alloy front and rear housing at just 3.6 lbs., minimizes fatigue for longer use and provides durability, improved heat dissipation, and resistance to corrosion and impact, ensuring reliable, long-lasting performance





The convenient one-hand switch regulator offers variable power settings, enabling multiple adjustments for different tasks while keeping your second hand free

Variable speed throttle provides accurate control

1/2" DRIVE

150% GREATER POWER TO WEIGHT RATIO VERSUS COMPARABLE PRODUCTS

458 FT-LB / LB POWER TO WEIGHT RATIO

The ergonomic handle design minimizes hand fatigue and improves user comfort ensuring a better user experience during prolonged use

The rotating air inlet enhances maneuverability, reduces hose twisting, and allows easier access to tight spaces, optimizing user comfort and efficiency

SX1202BT

SUNEX 1/2" Impact Wrench Protective Boot for SX1202

SPECIFICATIONS FOR SX1202

Square Drive	1/2"
Breakaway Torque	1,650 ft.-lbs.
Working Torque	750 ft.-lbs.
Free Speed	10,000 RPM
Average Air Consumption	5.5 CFM
Air Inlet	1/4" NPT
Minimum Hose Size	3/8" I.D.
Length	7.2"
Sound Level	96.8 dBA
Weight	3.6 lbs.

SUNEX®
TOOLS

THE EPITOME OF POWER & EFFICIENCY
IN A LIGHTWEIGHT DESIGN

3/4" DRIVE

150% GREATER POWER TO WEIGHT RATIO VERSUS COMPARABLE PRODUCTS

358 FT-LB / LB
POWER TO WEIGHT RATIO



- **High Performance -** Provides up to 2,400 ft-lbs. of breakaway torque and 1,600 ft-lbs. of working torque with 6,500 RPM, and a Power To Weight Ratio of 358 ft-lb/lb., delivering exceptional power for demanding applications
- **Magnesium Alloy Housing -** At just 6.7 lbs., this tool minimizes fatigue for longer use. Its magnesium housing provides durability, improved heat dissipation, and resistance to corrosion and impact ensuring reliable, long-lasting performance
- **7 Spring Loaded Blades -** Provide smoother operation and increased efficiency, leading to continuous high performance and a longer tool lifespan
- **Durable Handle -** High-impact resistant handle, crafted from 40% glass-filled nylon, offers a reliable grip with superior impact and wear resistance

SX3402

SUNEX® TOOLS


SUNEXPRESS WARRANTY

1 YEAR WARRANTY

3/4" DRIVE MAGNESIUM COMPOSITE IMPACT WRENCH

Magnesium Alloy front and rear housing at just 6.7 lbs., minimizes fatigue for longer use and provides durability, improved heat dissipation, and resistance to corrosion and impact, ensuring reliable, long-lasting performance





The convenient one-hand switch regulator offers variable power settings, enabling multiple adjustments for different tasks while keeping your second hand free

Variable speed throttle provides accurate control

3/4" DRIVE

150% GREATER POWER TO WEIGHT RATIO VERSUS COMPARABLE PRODUCTS

358 FT-LB / LB POWER TO WEIGHT RATIO

The ergonomic handle design minimizes hand fatigue and improves user comfort ensuring a better user experience during prolonged use

The rotating air inlet enhances maneuverability, reduces hose twisting, and allows easier access to tight spaces, optimizing user comfort and efficiency

SPECIFICATIONS FOR SX3402

Square Drive	3/4"
Breakaway Torque	2,400 ft.-lbs.
Working Torque	1,600 ft.-lbs.
Free Speed	6,500 RPM
Average Air Consumption	7.0 CFM
Air Inlet	3/8" NPT
Minimum Hose Size	3/8" I.D.
Length	8.5"
Sound Level	97.6 dBA
Weight	6.7 lbs.


SUNEX®
TOOLS

DEMOLISH RESISTANCE
WITH A POWERFUL LIGHTWEIGHT 1" DR. PISTOL GRIP IMPACT WRENCH

1" DRIVE

150% GREATER POWER TO WEIGHT RATIO VERSUS COMPARABLE PRODUCTS

213 FT-LB/LB POWER TO WEIGHT RATIO

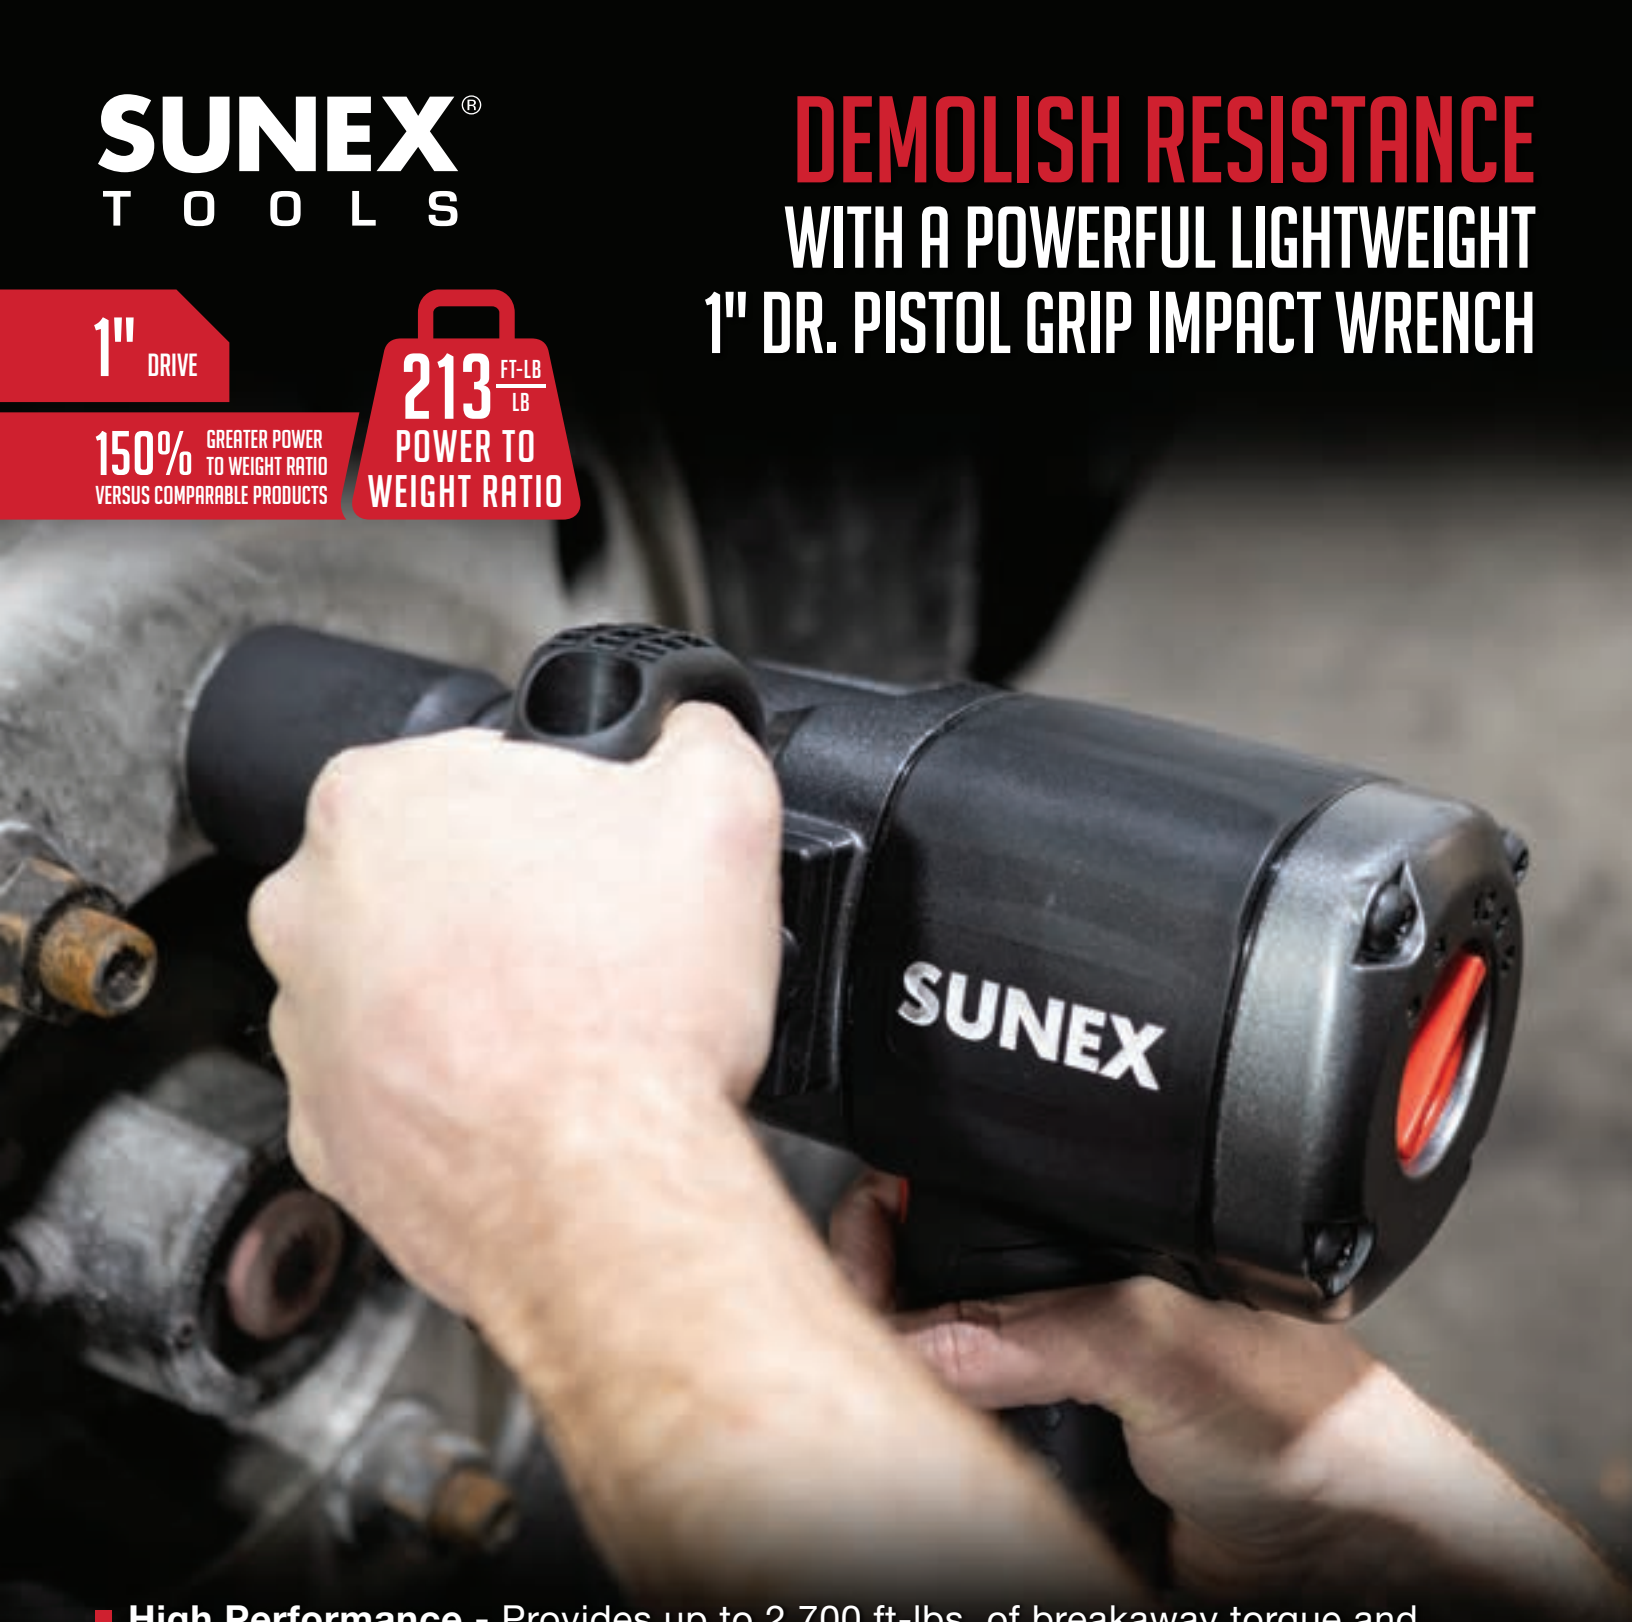

- **High Performance -** Provides up to 2,700 ft-lbs. of breakaway torque and 2,000 ft-lbs. of working torque with 6,000 RPM, and a Power To Weight Ratio of 213 ft-lb/lb., delivering exceptional power for demanding applications
- **Magnesium Alloy Housing -** At just 12.7 lbs., this tool minimizes fatigue for longer use and provides durability, improved heat dissipation, and resistance to corrosion and impact, ensuring reliable, long-lasting performance
- **7 Spring Loaded Blades -** Provide smoother operation and increased efficiency, leading to continuous high performance and a longer tool lifespan
- **Durable Handle -** High-impact resistant handle, crafted from 40% glass-filled nylon, offers a reliable grip with superior impact and wear resistance

SX0102

SUNEX® TOOLS


SUNEXPRESS WARRANTY

1 YEAR WARRANTY

1" DRIVE MAGNESIUM COMPOSITE IMPACT WRENCH

Magnesium Alloy front and rear housing at just 12.7 lbs., minimizes fatigue for longer use and provides durability, improved heat dissipation, and resistance to corrosion and impact, ensuring reliable, long-lasting performance





The convenient one-hand switch regulator offers variable power settings, enabling multiple adjustments for different tasks while keeping your second hand free

High-impact resistant handle offers a reliable grip with superior impact and wear resistance

Variable speed throttle provides accurate control

The ergonomic handle design minimizes hand fatigue and improves user comfort ensuring a better user experience during prolonged use

The rotating air inlet enhances maneuverability, reduces hose twisting, and allows easier access to tight spaces, optimizing user comfort and efficiency

1" DRIVE

213 FT-LB / LB POWER TO WEIGHT RATIO

150% GREATER POWER TO WEIGHT RATIO VERSUS COMPARABLE PRODUCTS

SPECIFICATIONS FOR SX0102

Square Drive	1"
Breakaway Torque	2,700 ft.-lbs.
Working Torque	2,000 ft.-lbs.
Free Speed	6,000 RPM
Average Air Consumption	7.5 CFM
Air Inlet	1/2" NPT
Minimum Hose Size	1/2" I.D.
Length	10.25"
Sound Level	103.3 dBA
Weight	12.7 lbs.

SUNEX®
TOOLS

DEMOLISH RESISTANCE

WITH A POWERFUL LIGHTWEIGHT 1" DR. IMPACT WRENCH WITH 6" EXTENDED ANVIL

1" DRIVE

200% GREATER POWER TO WEIGHT RATIO VERSUS COMPARABLE PRODUCTS

203 FT-LB / LB POWER TO WEIGHT RATIO



- **High Performance -** Provides up to 3,200 ft-lbs. of breakaway torque and 2,000 ft-lbs. of working torque with 5,500 RPM, and a Power To Weight Ratio of 203 ft-lb/lb.,delivering exceptional power for demanding applications
- **Magnesium Alloy Housing -** At just 15.8 lbs., this tool minimizes fatigue for longer use and provides durability, improved heat dissipation, and resistance to corrosion and impact, ensuring reliable, long-lasting performance
- **7 Spring Loaded Blades -** Provide smoother operation and increased efficiency, leading to continuous high performance and a longer tool lifespan
- **Durable Handle -** High-impact resistant handle, crafted from 40% glass-filled nylon, offers a reliable grip with superior impact and wear resistance

SX01026

SUNEX® TOOLS

SUNEXPRESS WARRANTY

1 YEAR WARRANTY

1" DRIVE MAGNESIUM COMPOSITE IMPACT WRENCH WITH 6" EXTENDED ANVIL


Magnesium Alloy front housing at just 15.8 lbs., minimizes fatigue for longer use and provides durability, improved heat dissipation, and resistance to corrosion and impact, ensuring reliable, long-lasting performance

Variable speed throttle provides accurate control

6" Extended Anvil for deep recessed bolts



High-impact resistant handle offers a reliable grip with superior impact and wear resistance

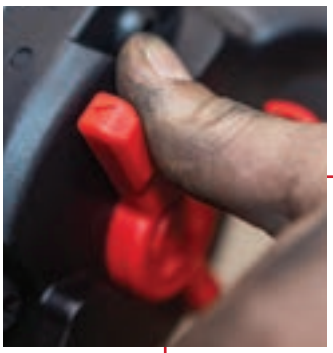

The rotating air inlet enhances maneuverability, reduces hose twisting, and allows easier access to tight spaces, optimizing user comfort and efficiency

The convenient one-hand switch regulator offers variable power settings, enabling multiple adjustments for different tasks while keeping your second hand free

1" DRIVE

200% GREATER POWER TO WEIGHT RATIO VERSUS COMPARABLE PRODUCTS

203 FT-LB / LB POWER TO WEIGHT RATIO

SPECIFICATIONS FOR SX01026

Square Drive	1"
Breakaway Torque	3,200 ft.-lbs.
Working Torque	2,000 ft.-lbs.
Free Speed	5,500 RPM
Average Air Consumption	7.5 CFM
Air Inlet	1/2" NPT
Minimum Hose Size	1/2" I.D.
Length	22.8"
Sound Level	102.2 dBA
Weight	15.8 lbs.